




# TRIAX

connecting the future

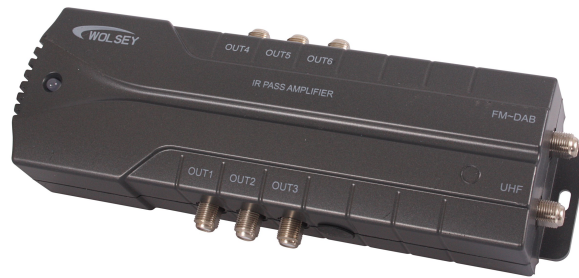

## LTE 6 Way IR Pass Amplifier

Article number: 334023

### Product description:

- Distributes to multiple TV's around the home
- Allows control of Sky Digital receivers when used with TRIAX Digital Links
- 2 Input 6 Output
- Short circuit protected on each output
- Power on LED
- Screened housing
- F-Connectors
- Easy to mount fixing
- Mains powered
- 9VDC/15mA on outputs

### Specifications

ORDER INFORMATION	
EAN Number	5702663340237
CHARACTERISTICS	
Output level IMD 2/IMD 3 @ 60 dB	93.0 dB $\mu$ V
Return Path	5...30 MHz
FREQUENCY	
Frequency range DAB	217-230 MHz

Frequency range FM	87.5-108 MHz
Frequency range	87.5-230 / 470-790 MHz
Output frequency range	85...790 MHz
Frequency range UHF	470-790 MHz
Frequency range BIII/DAB	85...230 MHz
<b>GAIN</b>	
Gain	10 +/-2 dB
Noise figure	<5 dB
<b>ELECTRICAL</b>	
Impedance	75 $\Omega$
<b>OPERATIONAL</b>	
LED indicator	Green
AC Supply voltage	230 $\pm$ 10% / 50Hz VAC
<b>CONNECTORS</b>	
Connector Type	F-female
Number of inputs	2
Number of outputs	6
<b>MECHANICAL</b>	
Colour	RAL 7016 - Anthracite grey
Packing QTY	1
Net Weight	0,550 kg
Tara Weight	0,100 kg
Total Weight	0,650 kg
Remarks	Fully screened within plastic housing >25dB rejection at 821MHz Short circuit protection on outputs