


Features

1. Power supply: 12VDC input
2. Plug & Play, real time transmit HDCVI/HDTV/AHD signals clear and stable
3. Unique Design: ABS engineering plastic case, Classic and elegant;
4. Connectors: Male BNC connectors for coax, and with push-pin terminals.



Overview

HAY-HDACTIVEVB01KIT is a single channel HD active UTP Video Transmitter over Cat5e/6, compatible with HD CVI, TVI, AHD, CVBS analog cameras. It is widely applied to the field of CCTV Video Transmission.

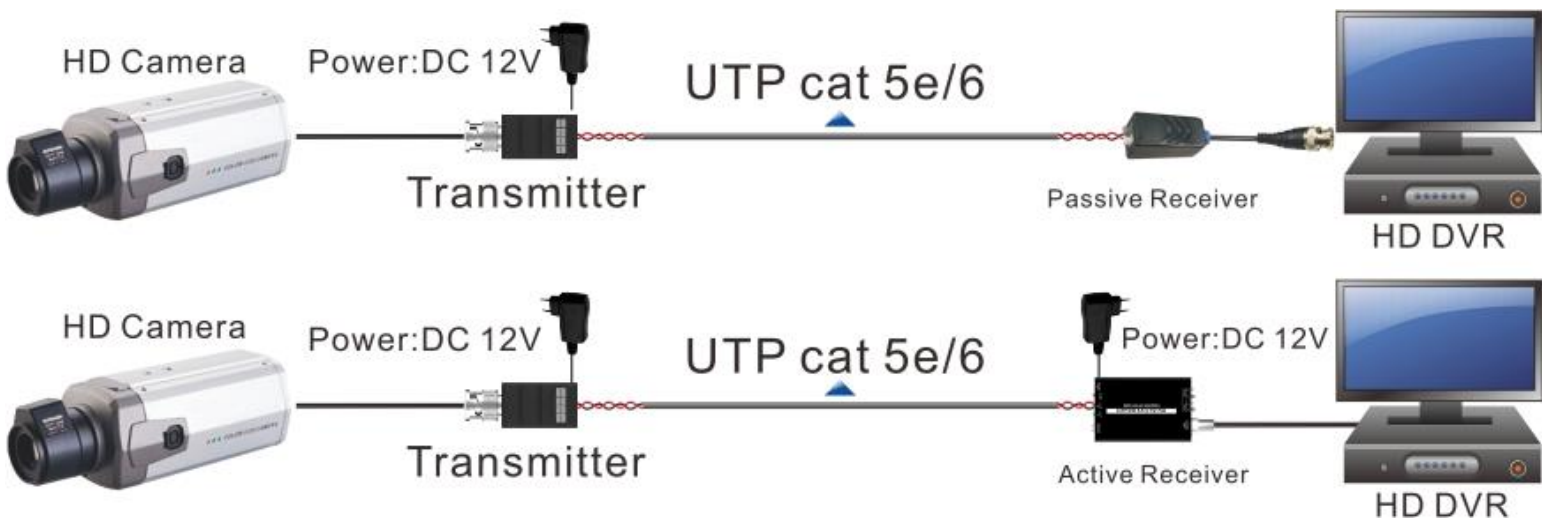

Channel	Single				
Input power supply	12V/1A				
Video connector over coax	BNC Male connector				
Cable	Cat5e/6 copper				
Anti-Interference	>60db				
Resolution Ratio	720P /1080P				
Impedance	BNC Male	75ohms			
	UTP	100ohms			
Transmission Distance	Resolution Ratio	1080P	1080P	720P	720P
	Solution	Passive TX	Active TX	Passive TX	Active TX
	HDCVI	360M	470M	450M	550M
	HDTVI	320M	400M	320M	400M
AHD	360M	470M	500M	700M	
Dimension	60*30*24.5mm (L*W*H)				
Weight (g)	50				
MTBF	MTBF>2000H				
Colour	Black				
Operating Temperature	Working Temperature: -5 to 45C				
	Storage Temperature: -20 to 70C				
Environment Humidity	Working Humidity: 90%, non-condensation				
	Storage Humidity: 95%, non-condensation				

- 1) **Power off**
- 2) Connect HAY-HDACTIVEVB01KIT to NVR: Male BNC of HAY-HDACTIVEVB01KIT to the female BNC of Camera
- 3) Check the connection of transmitter and receiver accordingly, make sure keep the same pin connection table.
- 4) Power on after well connected.