



FEATURES:

- Aluminum alloy material with surface spray treatment
- Side inlet and bottom inlet
- Interchangeable bottom waterproof cover and side gland nut
- Waterproof design


| | DS-1280ZJ-DM8 | |
|------------|---------------------------|---|
| SPEC | | |
| Parameters | Junction box | • |
| Colour | Hik Grey | • |
| Feature | Suitable for dome cameras | |
| Material | Aluminum Alloy | • |
| Dimension | Ø126.7 x 35mm | • |
| Weight | 210g | |
| | | |




INFORMATION:

- The junction box should be installed on the flat surface.
- The waterproof rubber is necessary for the outdoor application.
- The wall must be capable of supporting at least 3 times as much as the total weight of the camera and the bracket.
- The maximum load capacity of the bracket is 1 Kg (2.2 lb.).

unit: mm

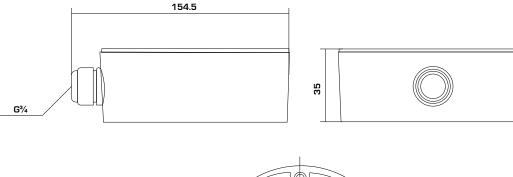



Ø165