


WIRING DIAGRAM

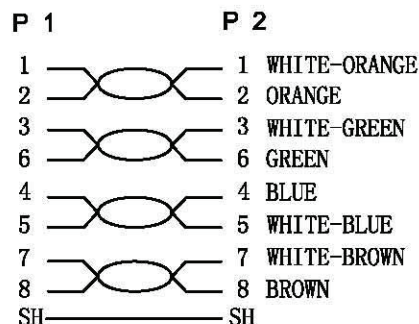

Length	T
$L \leq 1000$	+60/-0mm
$1000 < L \leq 10000$	+100/-0mm
$10000 < L \leq 20000$	+200/-0mm
$20000 < L$	+300/-0mm

MATERIAL LIST

⑥	PACKING	PE BAG	1	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL) COLOUR GRAY	2	
④	LABEL	NO DRY GLUE LABEL	1	
③	OVER MOLD	PVC COLOR GRAY (420C)	2	
②	CONNECTOR	RJ45 8P8C SHIELDED, PIN GOLD PLATED 3U", SHELL NICKEL PLATED	2	
①	CABLE	FTP CAT. 5E 26AWG (7/0. 16CCA) *4PAIR+MYLAR+DRAIN (7/0. 16CCA) +AL-FOIL JACKET:PVC/ GRAY (420C) OD:5.7±0.2mm	1	

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2010-10-28	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. PRINT BLACK WORD:
FTP CAT. 5E 26AWG×4P PATCH ISO/IEC 11801 & EN 50173 VERIFIED
3. Reach and ROHS COMPLIANT

Rotronic Co., Ltd.				
Title: VALUE CAT.5e CABLE FTP				
Item No.: see the chart				
			UNIT	MM
	DRAWN BY	CHECK BY	APPO BY	DATE
	LV WENFENG			2010-10-28