



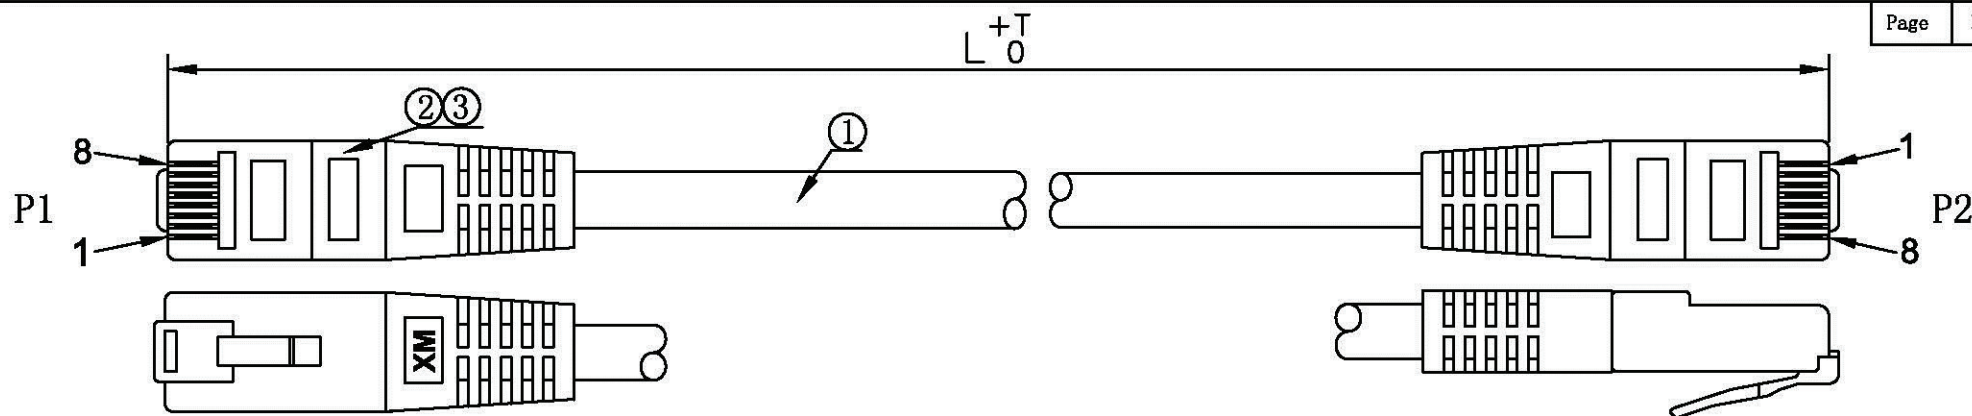

WIRING DIAGRAM

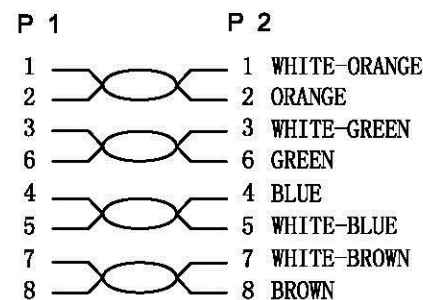

Length	T
$L \leq 1000$	$+60/-0\text{mm}$
$1000 < L \leq 10000$	$+100/-0\text{mm}$
$10000 < L \leq 20000$	$+200/-0\text{mm}$
$20000 < L$	$+300/-0\text{mm}$

MATERIAL LIST

⑥	PACKING	PE BAG	1	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL) COLOUR (GRAY 420C)	2	
④	LABEL	NO DRY GLUE LABEL	1	
③	OVER MOLD	PVC COLOR GRAY 420C	2	
②	CONNECTOR	RJ45 8P8C UNSHIELDED PIN GOLD PLATED 3U"	2	
①	CABLE	UTP CAT. 5E 24AWG (7/0.20CCA) *4PAIRS JACKET: PVC/GRAY (420C) OD: $5.4 \pm 0.2\text{mm}$	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW	2010-10-28	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. PRINT BLACK WORD:
UTP CAT. 5E 24AWG×4P PATCH ISO/IEC
11801 & EN 50173 VERIFIED
3. Reach and ROHS COMPLIANT

Rotronic Co., Ltd.

CUSTOMER	Rotronic Co., Ltd.	ITEM NO.	
PRODUCT NAME	CAT. 5E UTP	UNIT	MM
DRAWN BY	CHECK BY	APPO BY	DATE
LV WENFENG			2010-10-28