

NOTES:

1.MATERIAL

1.1 CABLE(3+7):[(7/0.12TC+FPE1.5+30/0.10TC+PVC2.5)*3]
 +(7/0.12TC+PVC)*7)+AL+7/0.16BC+128/0.12ALM+BLACK PVC
 (KKE75-5001-87 PVC JACKET;
 OD:8.2±0.2MM .

CABLE PRINTING: "LOW VOLTAGE COMPUTER CABLE 80°C 30V"

1.2 HDB15 TYPE MALE: SOLDER TYPE,EMPTY 9 PIN,
 GOLD PLATED CONTACTS AND NICKEL PLATED SHELL

1.3 SCREW:4*46MM,NICKED PLATED,
 #4-40UNC; BLACK(KKCS50-5001-95)PVC,

1.5 ALL HOODED:BLACK(KKCS50-5001-85)PVC.

2.TESTING: 100% SHORT AND OPEN TEST;


3.PACKING: 1PC/PE BAG+LABLE

4.ALL MATERIAL BE RoHS,REACH ENVIROMENTAL COMPLIANT.

P/N CHART

MODEL	LENGTH
11.99.5252	2000±50MM
11.99.5253	3000±70MM
11.99.5256	6000±75MM
11.99.5257	10000±150MM
11.99.5258	15000±200MM
11.99.5259	20000±300MM

PIN OUT

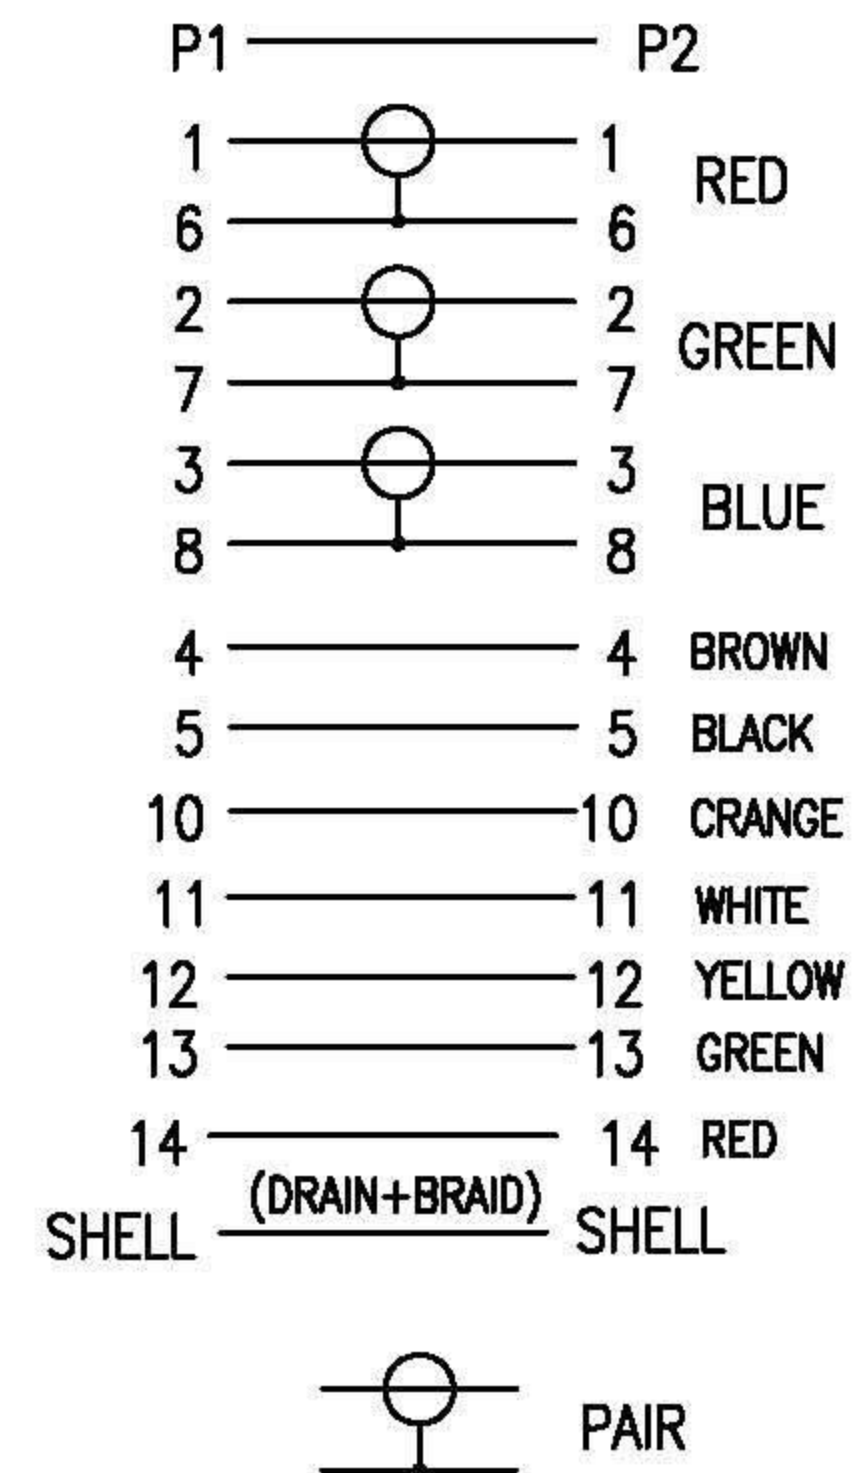

Rotronic Co., Ltd.

ENG.: Penny

REV.	MODIFY DESCRIPTION	DATE
02	ADD THREE NEW MODEL	2011-10-11
01	change the pin assignment	2011-9-21
00	NEW ISSUE	2011-9-19

DIMENSIONAL TOLERANCES:	SIZE: FREE
X. ±	UNIT: mm
.X ±	REV.: 02
.XX ±	PAGE: 1/1
X' ±3'	
.X' ±1'	

VALUE SVGA Cable, HD15 M-HD15 M, black		DRAWING NO.: 0282	
CHECKED:		APPROVED:	