


Request to Exit Button Range

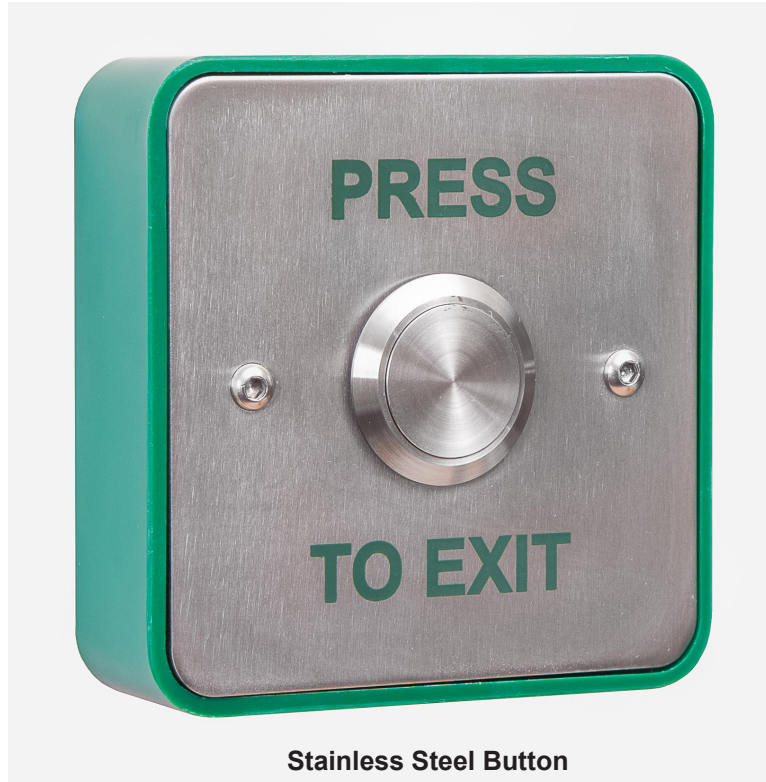


Stainless Steel Button

Technical specifications

- Contacts : Double pole NONC.
- Output : 4 AMP contact @ 30 V ACDC.
- Wear resistant legend.
- Security screws (Allen key type).
- Internal use only.

Approval : EN 50133 Industrial Codes of Practice

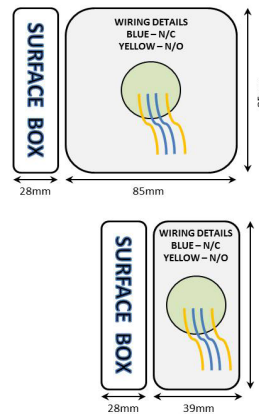

FEATURES

- Stainless steel button.
- Momentary operation
- High impact plastic back box.
- Can be surface or flush fitting.
- Easy clean surface. Ideal for general/sensitive areas.
- Screw footprint for flush fitting onto standard back box.

EBSS02/PTE	85x85x28 (mm)	22mm Standard stainless steel button	PRESS TO EXIT	240g (Boxed) / 198g (Unboxed)
EBSS02/DR	85x85x28 (mm)	22mm Standard stainless steel button	DOOR RELEASE	240g (Boxed) / 198g (Unboxed)
EBSS/AP/PTE	85x39x28 (mm)	22mm Architrave stainless steel button	PRESS TO EXIT	128g (Boxed) / 108g (Unboxed)
EBSS/AP/DR	85x39x28 (mm)	22mm Architrave stainless steel button	DOOR RELEASE	128g (Boxed) / 108g (Unboxed)
EBSS25/PTE	85x39x28 (mm)	25mm Large stainless steel button	PRESS TO EXIT	240g (Boxed) / 198g (Unboxed)
EBSS25/DR	85x39x28 (mm)	25mm Large stainless steel button	DOOR RELEASE	240g (Boxed) / 198g (Unboxed)

Other items in the RGL range.

