



DarkFighter[★]

DON'T BE LEFT IN THE DARK!

Hikvision DarkFighter Network Cameras

HIKVISION[®]

DARKFIGHTER OVERVIEW

By delivering colorful images at frame rates up to 60 fps under the poorest lighting conditions, Hikvision's DarkFighter Cameras see clearly in color what others can only see in black and white. During the day, with a superior Wide Dynamic Range (WDR), they can see through overly dark or brightly-lit areas.

Hikvision's DarkFighter Cameras feature various types, such as bullet and dome cameras with motorized varifocal lenses and PTZ cameras with up to 42x optical zoom.

The overall excellence of these cameras has been recognized by IFSEC's Security & Fire Excellence Award and the GIT Security Award, both have nominated the DarkFighter PTZ as a finalist.



Up to **6 MP** resolution

Aperture: **F0.95-C**

Focal length: **7 to 33 mm**

Format: **1/1.8"**

SUPERIOR NIGHTTIME PERFORMANCE

Featuring a large-sized progressive scan CMOS sensor and a

DARKEYE SLA lens

with a super large F0.95 aperture, Hikvision's DarkFighter Cameras can capture excellent color images in an extremely dark environment down to

0.002 lux.


To maintain superior image quality, the cameras automatically switch to monochrome by removing the IR filter to boost sensitivity when the illumination becomes lower than 0.002 lux.

An IR distance of up to


200 meters

is further supported to ensure clear imaging in the darkest environment.

Conventional camera

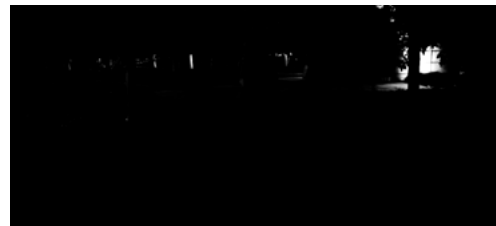


Hikvision DarkFighter camera

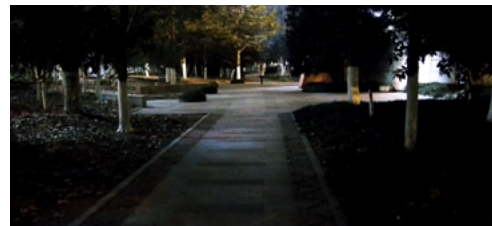

Conventional PTZ Camera - 23x



Hikvision DarkFighter PTZ - 23x

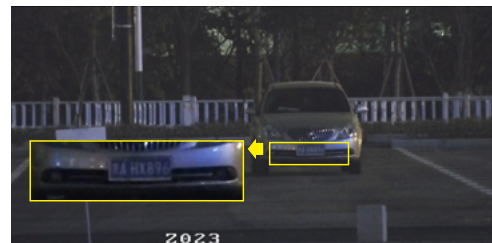

Conventional PTZ camera



Hikvision DarkFighter PTZ



SMART CODEC

As an intelligent algorithm supported by Hikvision's three core technologies—

Prediction Encoding,

Noise Suppression,


and Bitrate Control,

Smart Codec greatly decreases the bitrate of video based on the standard H.265+ codec. It features outstanding bandwidth- and storage-saving performances.

Extremely low requirements for bandwidth and storage



24-hour recording file sizes (in GB) of H.264, H.265, and H.265+

■ Daytime
■ Night

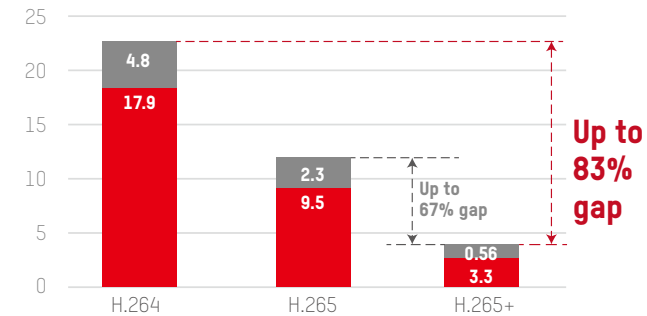

* The above data is from a test environment and is for reference only.

Bitrate comparison between H.264 and H.265+

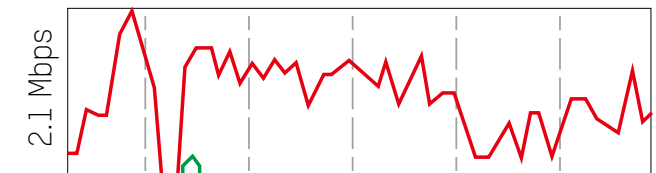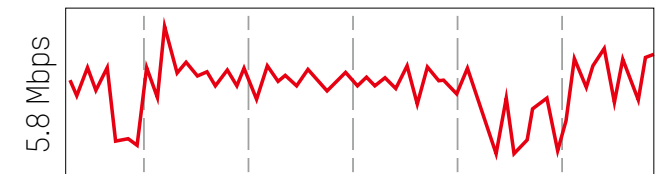

SMART FUNCTIONS

A wide array of

*Smart
and
Handy*

functions are built in
with Hikvision's DarkFighter Cameras
to make them even more

*Useful
and
Adaptable*

to specific security needs and in various
scenarios.

Target Cropping Stream

The third stream of video can be sent to a different source for recording or display in a pre-defined resolution, thus providing more details of a targeted area if needed.



ANPR


On-board ANPR analytics allow the ability to detect and recognize a vehicle's license plate and send ANPR info to a Smart NVR or iVMS-5200P for access management.

** Supports may vary based on local LPR algorithm development and customization process required.*



Object Left Behind / Object Removed

This function detects objects left or removed from a pre-defined region, triggering an alarm.

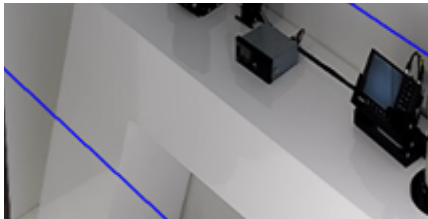

Region Entrance & Exit

This function detects people, vehicles or other objects that enter or exit from a pre-defined virtual region, triggering an alarm.



5 Series

DS-2CD502660-(AP)

2 MP Smart Network
Box Camera

2MP



1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps, MJPEG up to 1920 × 1080
Color: 0.002 lux @ (F1.2, AGC ON), B/W: 0.0002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264+, H.264
140 dB WDR
Auto iris, P-iris optional
Auto back focus optional
6 behavior analyses, 3 exception detections, face detection, and counting
5 defined streams and up to 5 custom streams supported
Built-in microSD/SDHC/SDHX card slot, up to 256 GB

DS-2CD504660-(AP)

4 MP Smart Network
Box Camera

4MP



1/1.8" Progressive Scan CMOS
2560 × 1440 @ 30 fps,
MJPEG up to 1920 × 1080 @ 30 fps
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264+, H.264
140 dB WDR
Auto iris, P-iris optional
Auto back focus optional
6 behavior analyses, 3 exception detections, face detection, and counting
5 defined streams and up to 5 custom streams supported
Built-in microSD/SDHC/SDHX card slot, up to 256 GB

DS-2CD512660-IZS

2 MP VF Dome
Network Camera

2MP



1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps
2.8 to 12 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
3D DNR
IR range up to 30 m
Five streams and up to five custom streams
6 behavior analyses, 3 exception detection, and face detection
Built-in microSD/SDHC/SDXC card slot, up to 256 GB
Alarm I/O, Audio I/O, RS-485
IK10

DS-2CD514660-IZS

4 MP VF Dome Network
Camera

4MP



1/1.8" Progressive Scan CMOS
2560 × 1440 @ 30 fps,
MJPEG up to 1920 × 1080 @ 30 fps
2.8 to 12 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
3D DNR
IR range up to 30 m
Five streams and up to five custom streams
6 behavior analyses, 3 exception detection, and face detection
Built-in microSD/SDHC/SDXC card slot, up to 256 GB
Alarm I/O, Audio I/O, RS-485
IK10

DS-2CD552660-IZS(HI)(Y)

2 MP VF Dome
Network Camera

2MP



1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps
2.8 to 12 mm/8 to 32 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
3D DNR
2.8 to 12 mm lens: IR range up to 30 m, 8 to 32 mm lens: IR range up to 50 m
Five streams and up to five custom streams
6 behavior analyses, 3 exception detection, and face detection
Built-in microSD/SDHC/SDXC card slot, up to 256 GB
Alarm I/O
IP67, IK10
Anti-IR reflection

DS-2CD554660-IZS(HI)(Y)

4 MP VF Dome
Network Camera

4MP



1/1.8" Progressive Scan CMOS
2560 × 1440 @ 30 fps,
MJPEG up to 1920 × 1080 @ 30 fps
2.8 to 12 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
3D DNR
IR range up to 30 m
Five streams and up to five custom streams
6 behavior analyses, 3 exception detection, and face detection
Built-in microSD/SDHC/SDXC card slot, up to 256 GB
Alarm I/O
IP67, IK10
Anti-IR reflection

DS-2CD5A2660-IZS(HI)(Y)

2 MP VF Bullet
Network Camera

2MP



1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps
2.8 to 12 mm/8 to 32 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
3D DNR
2.8 to 12 mm lens: IR range up to 50 m, 8 to 32 mm lens: IR range up to 100 m
Five defined streams and up to five custom streams
6 behavior analyses, 2 exception detection, and face detection
Built-in microSD/SDHC/SDXC card slot, up to 256 GB
Alarm I/O
IP67, IK10

DS-2CD5A4660-IZS(HI)(Y)

4 MP VF Bullet
Network Camera

4MP



1/1.8" Progressive Scan CMOS
2560 × 1440 @ 30 fps, MJPEG up to 1920 × 1080 @ 30 fps
2.8 to 12 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
3D DNR
IR range up to 50 m
Five defined streams and up to five custom streams
6 behavior analyses, 2 exception detection, and face detection
Built-in microSD/SDHC/SDXC card slot, up to 256 GB
Alarm I/O
IP67, IK10

7 Series

DS-2CD702660/P-(AP)

2 MP Network Box Camera



2MP

1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264+, H.264
140 dB WDR
3D DNR
Auto iris, P-iris optional
Auto back focus optional
1 RS-485 interface
Alarm I/O
Audio I/O
Five defined streams and up to five custom streams
6 behavior analyses, 3 exception detection
License Plate Recognition
Supports alarms for listed license plate in the blacklist and whitelist
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2CD704660-(AP)

4 MP Box Network Camera



4MP

1/1.8" Progressive Scan CMOS
2560 × 1440 @ 30 fps
Color: 0.002 lux @ (F1.2, AGC ON)
Auto-iris, DC drive and P-iris optional
Auto back focus (ABF) optional
H.265, H.265+, H.264, H.264+
140 dB WDR
Alarm I/O
Audio I/O, mono sound
Intelligent functions based on deep learning, including face capture, perimeter protection and queue management
Five defined streams and up to five custom streams
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2CD712660-IZS

2 MP IR Vari-Focal Dome Network Camera



2MP

1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps
2.8 to 12 mm and 8 to 32 mm motor-driven lens optional
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
IR range up to 30 m
Alarm I/O, Audio I/O, RS-485
IK10
Intelligent functions based on deep learning, including face capture, perimeter protection and queue management
Five defined streams and up to five custom streams
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2CD712660/L-IZS

2 MP VF Dome Network Camera



2MP

1/1.8" Progressive Scan CMOS
1920 × 1080 @ 30 fps
2.8 to 12 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
IR range up to 30 m
Alarm I/O, Audio I/O, RS-485
IK10
Queue management, based-on deep learning technology, supports queueing-up people number and waiting time detection
Five defined streams and up to five custom streams
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2CD714660-IZS

4 MP IR Vari-Focal Dome Network Camera



4MP

1/1.8" Progressive Scan CMOS
2560 × 1440 @ 30 fps
2.8 to 12 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
IR range up to 30 m
Alarm I/O, Audio I/O, RS-485
IK10
Intelligent functions based on deep learning, including face capture, perimeter protection and queue management
Five defined streams and up to five custom streams
Built-in microSD/SDHC/SDXC card slot, up to 256 GB



Positioning System

DS-2CD7A2660-IZ(H)S

2 MP IR Vari-Focal Bullet Network Camera



2MP

1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps
2.8 to 12 mm and 8 to 32 mm motor-driven lens optional
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
3D DNR
IR range: up to 50 m for 2.8 to 12 mm lens and up to 100 m for 8 to 32 mm lens
Alarm I/O
IP67, IK10
Intelligent functions based on deep learning, including face capture, perimeter protection and queue management
Five defined streams and up to five custom streams
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2CD7A2660/P-IZ(H)S

2 MP VF Bullet Network Camera



2MP

1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
3D DNR
Alarm I/O
IP67, IK10
1 RS-485 interface
IR range up to 50 m (2.8 to 12 mm), 100 m (8 to 32 mm)
Five defined streams and up to five custom streams
6 behavior analyses, 2 exception detection
License Plate Recognition
Supports alarms for listed license plate in the blacklist and whitelist
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2CD7A4660-IZ(H)S

4 MP IR Vari-Focal Bullet Network Camera



4MP

1/1.8" Progressive Scan CMOS
2560 × 1440 @ 30 fps
2.8 to 12 mm motor-driven lens optional
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
IR range: up to 50 m for 2.8 to 12 mm lens
Alarm I/O
IP67, IK10
Intelligent functions based on deep learning, including face capture, perimeter protection and queue management
Five defined streams and up to five custom streams
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2CD752660-IZ(H)S

2 MP IR Vari-Focal Dome Network Camera



2MP

1/1.8" Progressive Scan CMOS
1920 × 1080 @ 60 fps
2.8 to 12 mm and 8 to 32 mm motor-driven lens optional
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
IR range: up to 30 m for 2.8 to 12 mm lens and up to 50 m for 8 to 32 mm lens
Alarm I/O, Audio I/O
IP67, IK10
Anti-IR reflection
Intelligent functions based on deep learning, including face capture, perimeter protection and queue management
Five defined streams and up to five custom streams
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2CD754660-IZ(H)S

4 MP IR Vari-Focal Dome Network Camera



4MP

1/1.8" Progressive Scan CMOS
2560 × 1440 @ 30 fps
2.8 to 12 mm motor-driven lens
Color: 0.002 lux @ (F1.2, AGC ON)
H.265, H.265+, H.264, H.264+
140 dB WDR
IR range up to 30 m
Alarm I/O, Audio I/O
IP67, IK10
Anti-IR reflection
Intelligent functions based on deep learning, including face capture, perimeter protection and queue management
Five defined streams and up to five custom streams
Built-in microSD/SDHC/SDXC card slot, up to 256 GB

DS-2DY923618X-A

2 MP 36x 800 m Laser Network Positioning System



36x

1/1.9" progressive scan CMOS
Up to 1920 × 1080 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
36× optical zoom, 16× digital zoom
120 dB WDR, 3D DNR, HLC, BLC, smart supplement light
24 VAC
Up to 800 m laser distance
H.265+/H.265 video compression

DS-2DY92361X-A

2 MP 36x 200 m IR Network Positioning System



36x

1/1.9" progressive scan CMOS
Up to 1920 × 1080 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
36× optical zoom, 16× digital zoom
120 dB WDR, 3D DNR, HLC, BLC, smart supplement light
24 VAC
Up to 200 m IR distance
H.265+/H.265 video compression

DS-2DY5223IW-AE

2 MP 23x 150 m IR Network Positioning System



23x

Up to 1920 x 1080 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
23× optical zoom, 16× digital zoom
Low bit rate, true WDR, Defog, smart supplement light
3D intelligent positioning
Power-off memory, proportional zoom
Analog/Network dual output
Support Wiper
Up to 150 m IR distance
Supports Hi-PoE

PTZ

DS-2DF8A436-I(N)X-AEL(C)
4 MP 36x Network
PTZ Dome



36x

1/1.8" progressive scan CMOS
Up to 2560 × 1440 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
0 lux with IR
36x optical zoom, 16x digital zoom
120 dB WDR, 3D DNR, HLC, BLC, Optical defog, EIS
24 VAC & Hi-PoE
H.265+/H.265 video compression
Deep-learning-based target classification algorithm
for auto-tracking 2.0 and perimeter protection
Rapid focus
IP67, IK10

DS-2DF6A436X-AEL(C)
4 MP 36x Network
PTZ Dome



36x

1/1.8" progressive scan CMOS
Up to 2560 × 1440 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
36x optical zoom, 16x digital zoom
120 dB WDR, 3D DNR, HLC, BLC, Optical defog, EIS
24 VAC & Hi-PoE
H.265+/H.265 video compression
Deep-learning-based target classification algorithm for
auto-tracking 2.0 and perimeter protection
Rapid focus
IP67, IK10

DS-2DF6A425X-AEL(C)
4 MP 25x Network
PTZ Dome



25x

1/1.8" progressive scan CMOS
Up to 2560 × 1440 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
25x optical zoom, 16x digital zoom
120 dB WDR, 3D DNR, HLC, BLC, Optical defog, EIS
24 VAC & Hi-PoE
H.265+/H.265 video compression
Deep-learning-based target classification algorithm
for auto-tracking 2.0 and perimeter protection
Rapid focus
IP67, IK10

DS-2DF6A236X-AEL
2 MP 36x Network
PTZ Dome



36x

1/1.8" progressive scan CMOS
Up to 1920 × 1080 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
36x optical zoom, 16x digital zoom
120 dB WDR, 3D DNR, HLC, Smart IR
24 VAC & Hi-PoE
Optical defog
H.265+/H.265 video compression
Rapid focus
Deep-learning-based target classification algorithm
for auto-tracking 2.0 and perimeter protection
IP67, IK10

DS-2DF6A225X-AEL(C)
2 MP 25x Network
PTZ Dome



25x

1/1.8" progressive scan CMOS
Up to 2560 × 1440 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
0 lux with IR
25x optical zoom, 16x digital zoom
120 dB WDR, 3D DNR, HLC, BLC, Optical defog, EIS
24 VAC & Hi-PoE
H.265+/H.265 video compression
Deep-learning-based target classification algorithm
for auto-tracking 2.0 and perimeter protection
Rapid focus
IP67, IK10

DS-2DF6225X-AEL
2 MP 25x Network PTZ
Dome



25x

1/1.9" progressive scan CMOS
Up to 1920 × 1080 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
25x optical zoom, 16x digital zoom
120 dB WDR, 3D DNR, HLC, Optical Defog
24 VAC & Hi-PoE
H.265+/H.265 video compression
Deep-learning-based target classification algorithm
for auto-tracking 2.0 and perimeter protection

DS-2DF8436IX-AEL(W)
4 MP 36x 200 m IR
Network PTZ Dome



36x

1/1.8" progressive scan CMOS
Up to 2560 × 1440 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
36x optical zoom, 16x digital zoom
WDR, 3D DNR, HLC, Smart IR
24 VAC & Hi-PoE
Optical defog
Up to 200 m IR distance
H.265+/H.265 video compression
Rapid focus
Deep-learning-based target classification algorithm
for auto-tracking 2.0 and perimeter protection
IP67, IK10 (without wiper)

DS-2DF8425IX-AEL(W)
4 MP 25x 200 m IR
Network PTZ Dome



25x

1/1.8" progressive scan CMOS
Up to 2560 × 1440 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
0 lux with IR
25x optical zoom, 16x digital zoom
WDR, 3D DNR, HLC, Smart IR
24 VAC & Hi-PoE
Up to 200 m IR distance
H.265+/H.265 video compression
Rapid focus
Deep-learning-based target classification
algorithm for auto-tracking 2.0 and perimeter
protection
IP67, IK10

DS-2DF8236IX-AEL(W)
2 MP 36x 200 m IR
Network PTZ Dome



36x

1/1.8" progressive scan CMOS
Up to 1920 × 1080 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
0 lux with IR
36x optical zoom, 16x digital
zoom
120 dB WDR, 3D DNR, HLC, Smart
IR
24 VAC & Hi-PoE
Up to 200 m IR distance
H.265+/H.265 video compression
Deep-learning-based target

DS-2DF8242IX-AEL(W)
2 MP 42x 400 m IR
Network PTZ Dome



42x

1/1.8" progressive scan CMOS
Up to 1920 × 1080 resolution
Min. illumination:
Color: 0.002 lux @ (F1.5, AGC ON)
B/W: 0.0002 lux @ (F1.5, AGC ON)
0 lux with IR
42x optical zoom, 16x digital zoom
120 dB WDR, 3D DNR, HLC, Smart IR
24 VAC & Hi-PoE
Up to 400 m IR distance
H.265+/H.265 video compression
Rapid focus
Deep-learning-based target classification algorithm for
auto-tracking 2.0 and perimeter protection
IP67, IK10

DS-2DE4A204IW-DE
2 MP 4x 50 m IR Network
PTZ Dome



4x

1/1.9" progressive scan CMOS
Up to 1920 × 1080 resolution
Min. illumination:
Color: 0.002 lux @ (F1.6, AGC ON)
B/W: 0.0002 lux @ (F1.6, AGC ON)
4x optical zoom, 16x digital zoom
Digital Defog, EIS, 3D DNR, BLC, HLC, WDR
Up to 50 m IR distance
Supports auto-tracking
12 VDC & PoE+ (802.3at, class4)
H.265+/H.265 video compression

DS-2DE4A404IW-DE
4 MP 4x 50 m IR Network
PTZ Dome



4x

1/1.9" progressive scan CMOS
Up to 2560 × 1440 resolution
Min. illumination:
Color: 0.002 lux @ (F1.6, AGC ON)
B/W: 0.0002 lux @ (F1.6, AGC ON)
4x optical zoom, 16x digital zoom
Digital WDR, HLC, BLC, 3D DNR, Digital Defog, EIS,
Regional Exposure, Regional Focus
Up to 50 m IR distance
Supports auto-tracking
12 VDC & PoE+ (802.3at, class4)
H.265+/H.265 video compression

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Germany
T +49-69-401507290
sales.adch@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (0) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +6-032-7224000
sales.my@hikvision.com

Hikvision Philippines
sales.ph@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

DON'T BE LEFT IN THE DARK!

Hikvision DarkFighter Network Cameras

HIKVISION



Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



hikvision



Hikvision
Corporate Channel