


**SFX/SPK-SS-4C-2.5-LSZH-BLK**

Speaker Cable Secure Sound 4 Core OFC 2.5mm Round Black LSZH

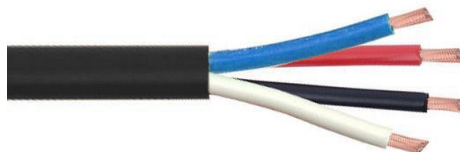

<b>Cable Construction</b>	4 Cores
Conductor	Bare Copper
Conductor Diameter (mm)	0.25 ±0.008 x 50
<b>Insulation</b>	LSZH
Insulation Thickness (mm)	0.48
Insulation Diameter (mm)	3.00 ±0.15
Insulation Colours	Red,Black,Blue,White
Filler	Chalk
<b>Jacket</b>	LSZH
Jacket Thickness (mm)	0.80 ±0.01
Overall Diameter (mm)	10.00 ±0.20
Jacket Colour	Black RAL 9005
Sheath Printing	Secure Sound 4C 2.5mm OFC Speaker LSZH RoHS2 (PO) (m)
Reaction to Fire	Fca
<b>Electrical Characteristics</b>	
Max Conductor DC resistance @ 20°C	<8Ω/km
Rated Temperature	70°C
Rated Voltage	30V
Insulation Resistance @20°C	>200MΩ/km