




THE INDUSTRY'S MOST TRUSTED CABLE BRAND

SFX/SPK-SS-2C-PL-1.5-PVC-CLR

Speaker Cable Secure Sound 2 Core OFC 1.5mm Parallel Gold Clear PVC

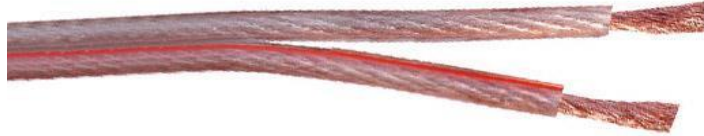

Cable Construction	2 Cores
Conductor	Oxygen Free Copper
Conductor Diameter (mm)	0.10 ±0.008 x 189
Insulation	PVC
Insulation Thickness (mm)	0.61
Insulation Diameter (mm)	5.90 ±0.10 x 2.60 ±0.10
Insulation Colours	Clear (1 Core marked with Red stripe)
Sheath Printing	Secure Sound 2C 1.5mm OFC Parallel Speaker Cable PVC CE RoHS2 (PO) (m)
Reaction to Fire	Fca
Electrical Characteristics	
Max Conductor DC resistance @ 20°C	<12.5Ω/km
Rated Temperature	80°C
Rated Voltage	30V
Insulation Resistance @20°C	>200MΩ/km



www.sfxcables.co.uk

Every care is taken to ensure all information in this publication is correct. No Legal responsibility can be accepted for any inaccuracy.
The company reserves the right to alter or modify the information of this specification without notice. E&OE.