




ARCHITECTURAL BRACKETS RGL SAFETY RANGE



MAGNETIC LOCK

Fire tested range of maglocks and brackets from a market leader in access control.

FIRE TESTED to
BSEN1634-1-2014 & BS476:Part22:1987
(30, 60, 90 & 120 min timber door-sets)

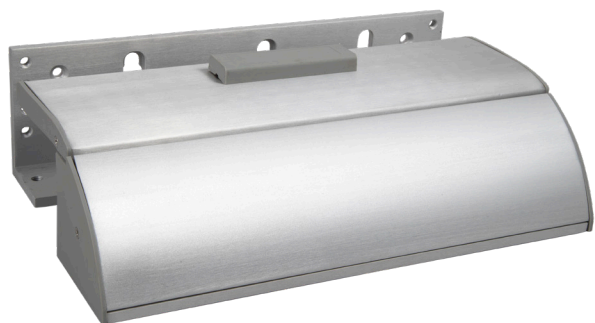


BK1200-F-L/AB

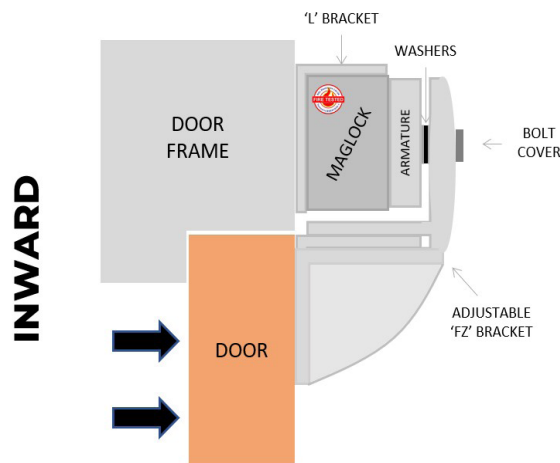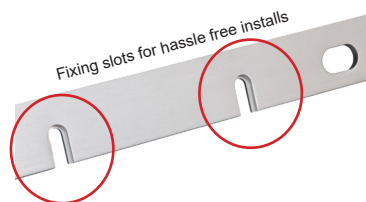

SPECIFICATION

- BK1200-F-L/AB
- Specially designed bracket slots that allows for a simple one person installation of maglocks
- Fully adjustable brackets
- Suitable for all RGL Standard Maglocks - inc: ML1200 / ML1200-M



DIMENSIONS

- BK1200-F-L/AB
- 265x72x45 (mm) L Bracket (LxWxD)
- 265x60x60 (mm) Z Bracket (LxWxD) x2
- 3.74kg Boxed

FEATURES

- BK1200-F-L/AB
- Fire rated (30, 60, 90 & 120 min timber door set)
- L bracket for use on outward opening doors
- ZL bracket for use on inward opening doors
- Anodised aluminium finish
- Z Bracket can provide an extra 20mm-30mm of reach for non standard door settings

If you are looking for alternative options, then please view the following bracket:

Other bracket options:

- BK1200ZL (ZL Bracket)
- ADJ1200-L (Highly adjustable L)
- AH1200 (Required for Fire Doors)
- BK1200L (L Bracket)

INWARD
OUTWARD

CONTENTS

- BK1200-F-L/AB
- L Bracket (1200lb)
- 1 x ZL Brackets
- 1 x Fixing kits
- End caps

OTHER PRODUCTS

EBNT/TF-1



120ISM-1



BK600-F-L/AB



DU-CB/PTE



Manufactured by a BSIA Member