


## USB C Female to Male Tailed Socket

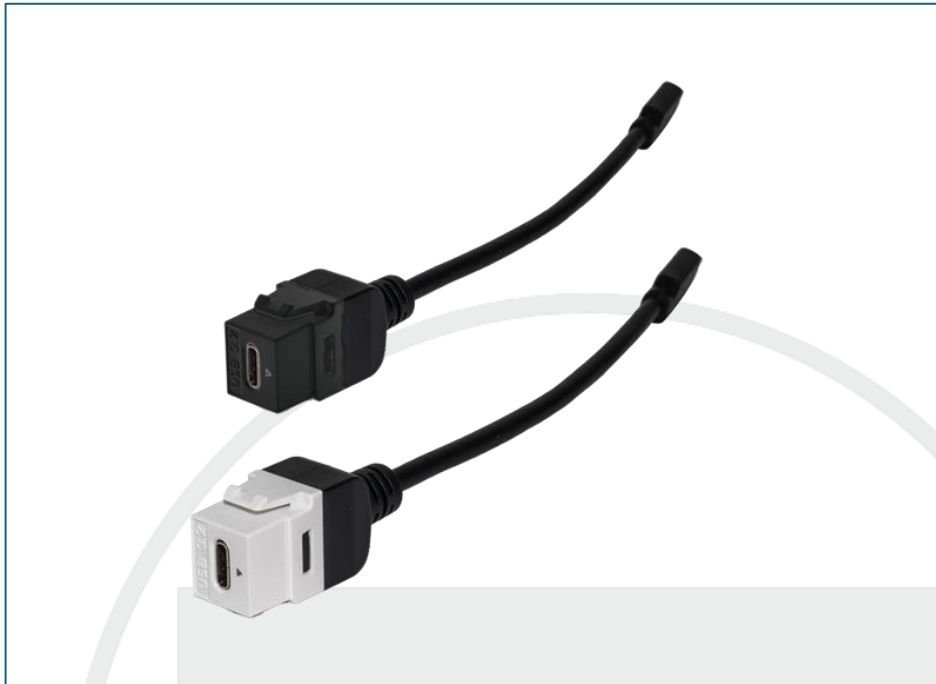

### **USB C 3.2 female to male tailed socket (KUCCbK1820, KUCcWh1820):**

Our USB C female to male tailed socket is an ideal solution for transmitting power and data. Designed to fit industry standard keystone patch panels, faceplate adaptors or surface mount boxes

#### **Features:**

- Single wired connection transmits at twice the speed as USB 3.0 connectors (10 Gbps vs 5 Gbps)
- Standard profile keystone socket offered in black and white
- Suitable for use in keystone patch panels, faceplates or surface mount boxes
- Compact and robust; straight (180°) presentation
- Current rating: 5A, maximum 100W(20V/5A)

#### **Specifications:**


- Net weight (including primary packaging): 22 g
- Dimensions: 200 x 33.67 x 16.30mm
- Colour: black or white socket with black tailed plug
- Materials: Socket: ABS UL94V0  
Tail: PVC UL2725

**Packaging:** Packed in individual polybags then in bags of 20

**EAN:** KUCCBk1820: 5055386513205  
 KUCCWh1820: 5055386513212  
 KUCC1820Bpm: 5055386513250  
 KUCC1820pm: 5055386513304  
 KUCC1820Dpm: 5055386513311  
 KUCC182090: 5055386513328

**Commodity Code:** 85444920

**Country of Origin:** China

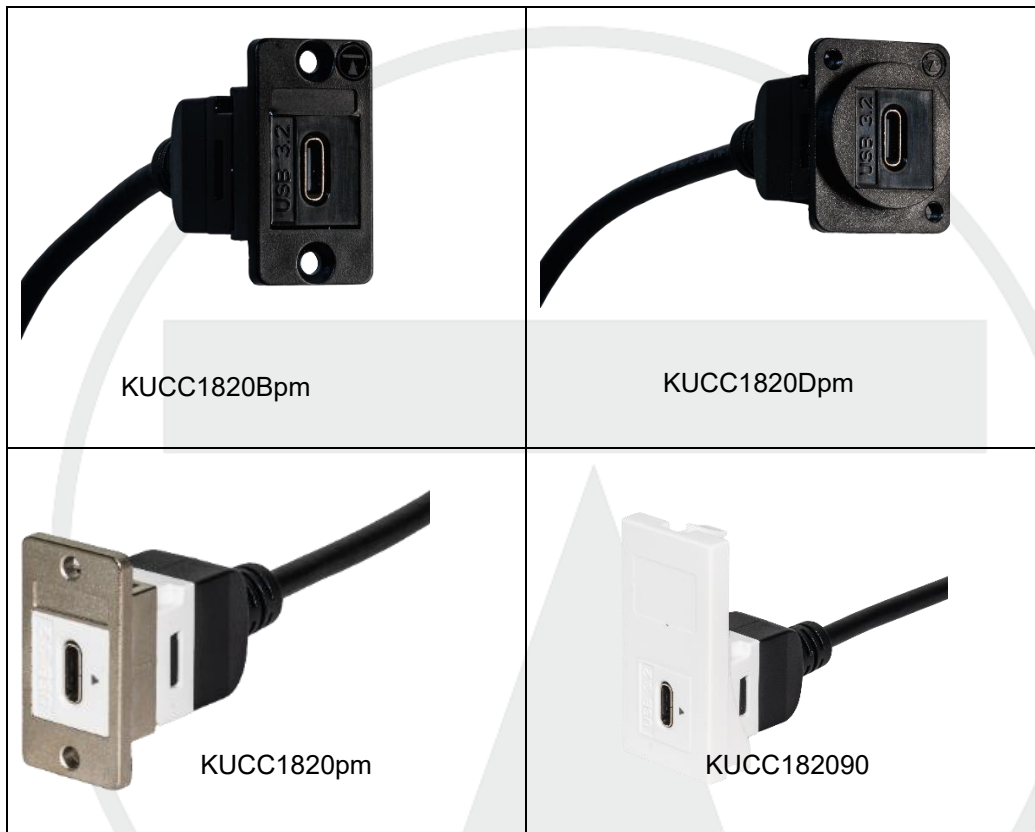

**Available in panel mount, low profile panel mount, D Universal and 90° Euro faceplate.**




[KUCC\\*20](#)

The KUCC USB C adapter comes in 2 variants, the [KUCC\\*20](#), with angled lead and the [KUCC\\*1820](#), with a straight (180°) lead.


[KUCC\\*1820](#)

ROHS Compliant

Code: KUCCBk/Wh

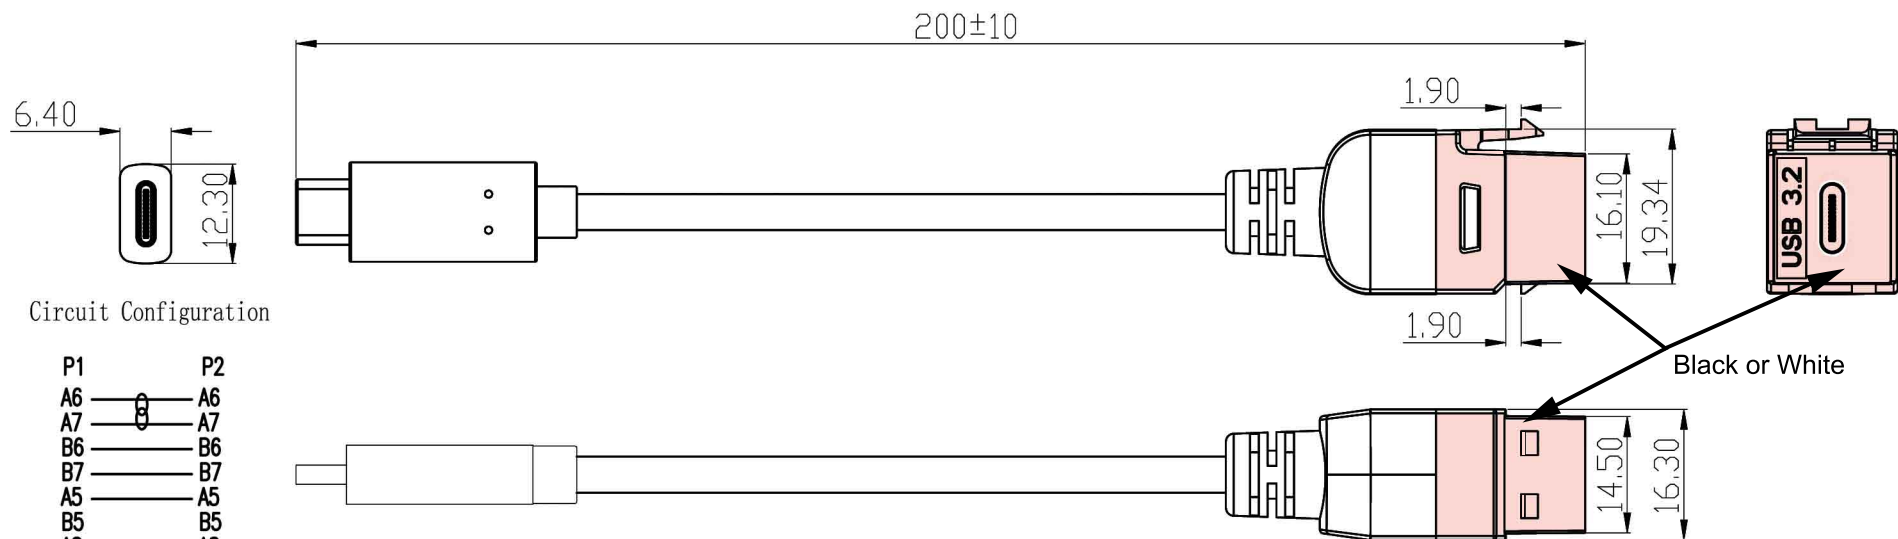

Circuit Configuration

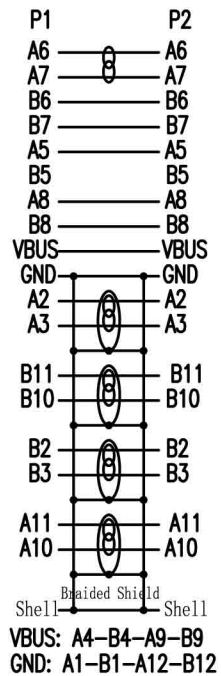

Electrical Specification

Insulation Resistance: 10MΩ  
 Voltage Proof: DC300V/0.01S  
 Contact Resistance: 3Ω  
 Current Rating: MAX 100W(20V/5A)

Plastic Material: PVC

Cable Specification:

UL2725(32AWG\*1P+D+AL/MY)\*4+32AWG\*1P+32AWG\*4C+24AWG\*2C+AB(85%TC),  
 Black PVC Jacket, OD 4.5mm