

DS-D5AC12T5-8S2 OPS Module



- Intel® UHD Graphics 750, support 4K resolution
- Support M.2 nvme system disk quick start
- Support 4 USB 3.0 ports, 2 USB2.0 ports, 1 HDMI port, 1 DP interface, 1 Type-C port
- Support Wi-Fi IEEE 802.11 a/b/g/n/ac/ax (Wi-Fi 6)
- Support TPM 2.0

▪ Specification

Built-in System	
Operation System	WIN11 ENT
Processor	Intel® Core, i5-12450H, 12th
CPU Clock Speed	2.0 GHz Base, 4.4GHz Turbo
CPU Cores	10
CPU Threads	16
Memory	8G
Graphics	Intel® UHD Graphics 750
Platform Architecture	Intel® Alder Lake H
Cooling System	Single Brass & Single Fan
Storage	256G
Interface	
Video & Audio Input	Audio in *1
Video & Audio Output	HDMI1.4 * 1; DP 1.2* 1; Audio out *1
Network Interface	RJ45 (10/100/1000 Mbps) * 1 WIFI 6
Data Transmission Interface	Bluetooth 5.2 USB 3.0 * 4; USB 2.0 * 2; Type-C * 1
Antenna	2
Power	
Standby Consumption	0.5W
Input Voltage	12V-19V DC
Max. Consumption	95W
General	
Product Dimensions (W × H × D)	195×30×180mm
Package Dimensions (W × H × D)	Carton with a single module : 308 * 80 * 278 mm Carton with five modules : 420 * 298 * 320 mm
Net Weight	About 1.22kg
Gross Weight	Carton with a single module : about 1.36 kg Carton with five modules : about 7.50 kg
Color	Black
Working Environment	
Working Temperature	0°C - 40°C
Working Humidity	10%-90%
Storage Temperature	-20°C - 60°C
Storage Humidity	10%-90%

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global




Hikvision
Corporate Channel



hikvisionhq

▪ **Dimension**

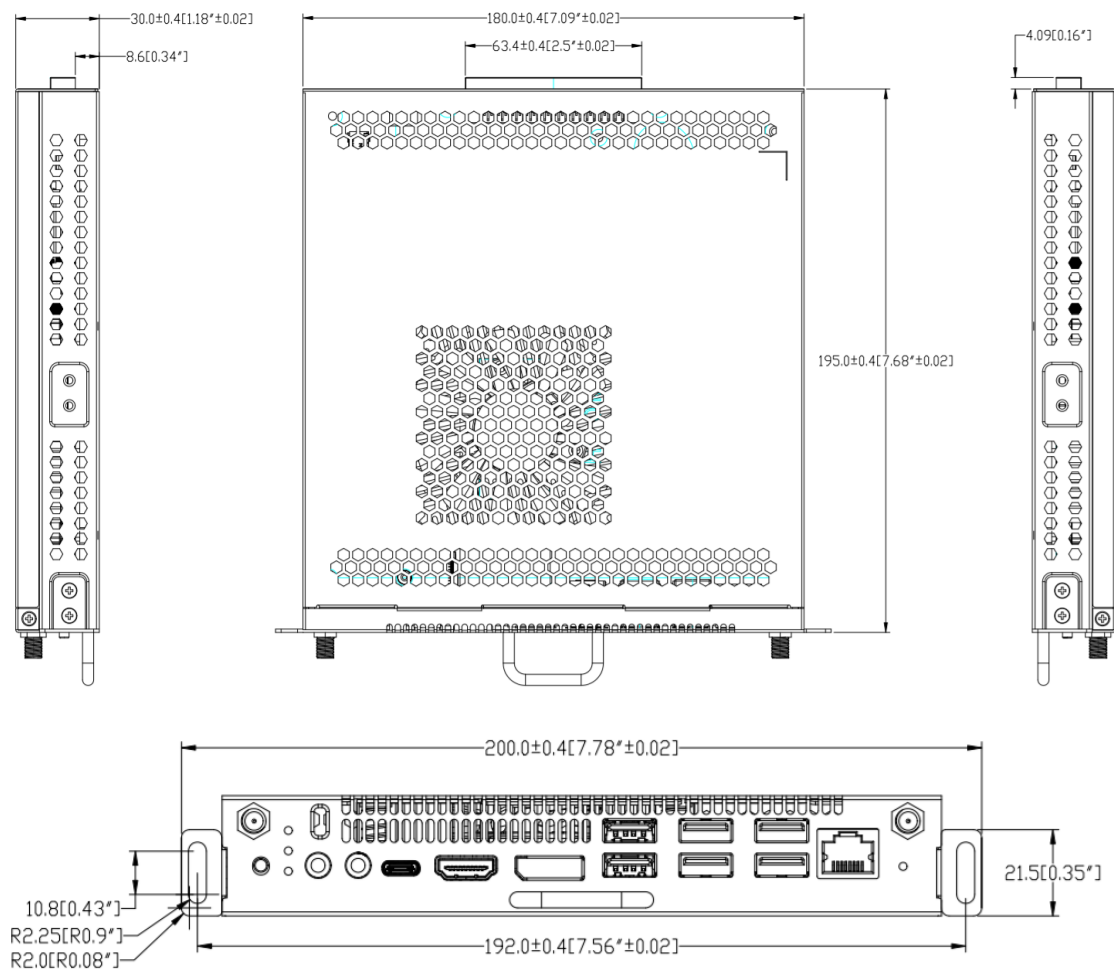

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

