

DS-1105KI Network Keyboard




DS-1105KI is a new generation network keyboard independently developed by Hikvision. It features a 7-inch LCD touch screen and a 4-axis joystick. It supports network access to DVRs, DVSS, NVRs, network cameras, network domes, multi-functional video centers (MVCs), decoders, iSecure, and HikCentral and supports analog matrix and analog dome access, with powerful functions and quick and simple operations. It can be widely used in finance, telecommunication, transportation, electric power, education, water conservancy, and other fields.

- 7-inch LCD touch screen with 1024 × 600 resolution
- Optical axis mechanical buttons
- Displays the output of multi-functional video centers (MVCs) and decoders on video wall
- Supports video wall division by areas
- Supports PTZ control, settings and calling of presets and patrols
- Supports the preview of 4-ch network cameras with a resolution of 1080p or lower on the touch screen
- Supports remote video playback via the keyboard or video wall
- Supports playing the video playback fast and slow, pausing and stopping the video playback
- Supports capturing the pictures and saving the videos to the USB flash drive or FTP server connected to the keyboard
- Allows 32 users (1 administrator and 31 operators) to manage a maximum of 4000 devices
- Supports network access to DVRs, DVSS, NVRs, decoders, multi-functional video centers (MVCs), network cameras, network domes, iSecure and HikCentral
- Supports remote control of DVR operation panels to achieve preview, recording, PTZ control, and other operations
- Accessible to DVRs, NVRs, and analog domes via serial ports
- Controls analog domes via RS-485 serial port

▪ Specification

| Model | DS-1105KI | |
|-------------------------|----------------------|---|
| Device Parameter | Display | 7 inch LCD |
| | Control Method | Network method, serial control |
| | Power Supply | 12 VDC |
| | Consumption | ≤ 15 W |
| | Dimension | 435 mm × 193 mm × 110 mm (17.13 inch × 7.60 inch × 4.33 inch) (L × W × H) |
| | Weight | 2 kg (4.41 lb.) |
| | Compatible System | Linux system |
| Decoding Parameter | Performance | 4 × 1080p |
| Environmental Parameter | Working Temperature | -10 °C to 55 °C (14°F to 131°F) |
| | Working Humidity | 10% to 90% |
| External Interface | Network | RJ45 100 M/1000 M self-adaptive Ethernet interface × 1 |
| | Wi-Fi | Not supported |
| | Serial Port | RS-232, RS-485 |
| | Two-Way Audio Input | One-way MIC IN, supporting 48 VDC phantom power supply |
| | Two-Way Audio Output | 3.5 mm stereo (linear level, impedance 600 Ω) × 1 |
| | Joystick | 4-axis single button joystick |
| | USB Interface | USB 2.0 × 1 |
| | Video Interface | HDMI × 1, VGA × 1 |

▪ Typical Application

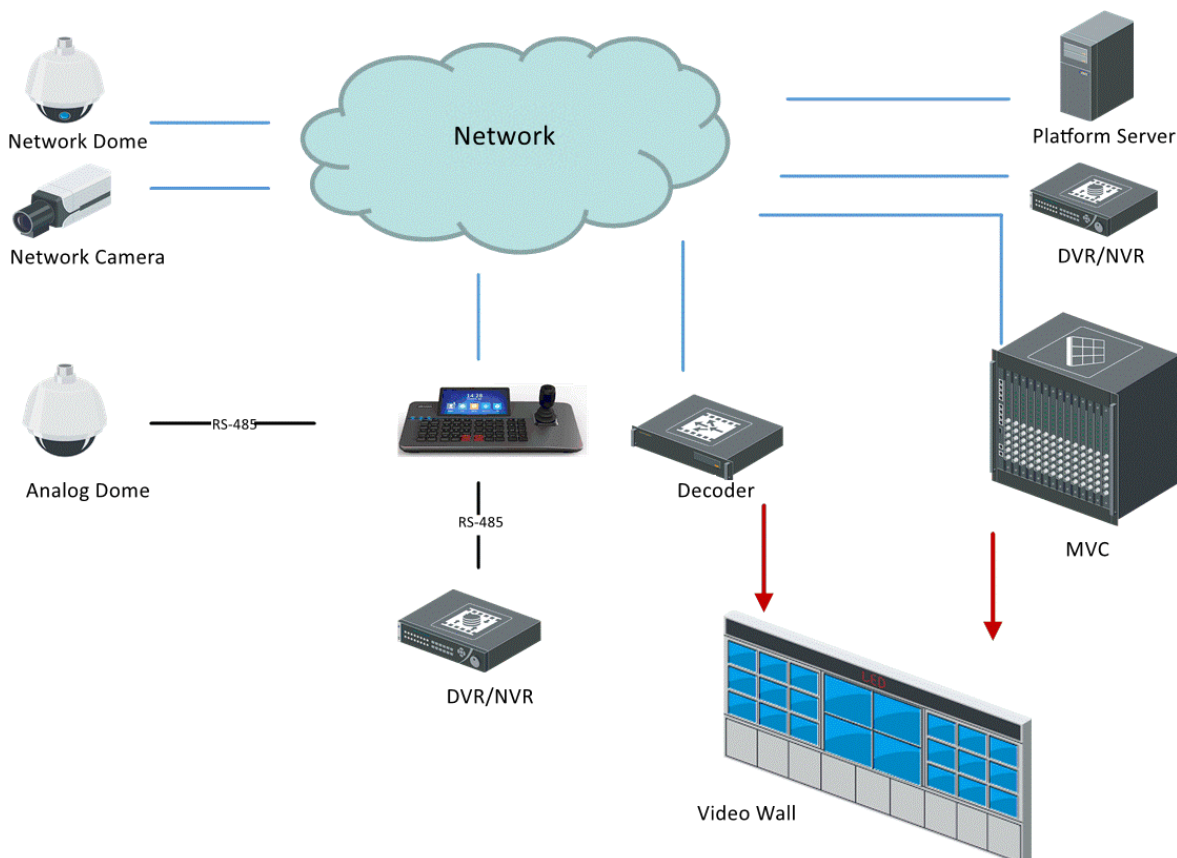

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ **Available Model**

DS-1105KI

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq