


SFX/CW1198 - 5Pair SWA PE Black

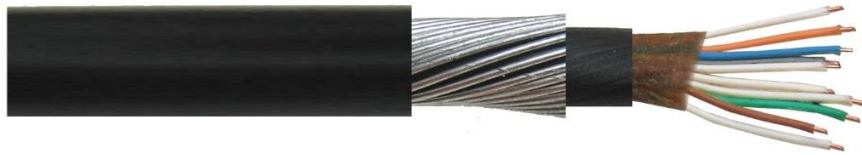

Cable Construction		Bare Copper	
Multi Construction:	5 Pairs (10 Cores) Each Pair twisted, unshielded		
Construction (mm)	0.50±0.01		
Insulation		Gas injected PE	
Thickness	0.2		
Insulation Diameter (mm)	0.90±0.05		
Jelly Filled Cotton Paper Spiral Binder Spiral			
Colours	A	B	Lay Length (mm)
Pair 1	White	Blue	62
Pair 2	White	Orange	65
Pair 3	White	Green	68
Pair 4	White	Brown	72
Pair 5	White	Grey	75
Inner Jacket		PE	
Thickness (mm)	≥1.0		
Diameter (mm)	7.80±0.25		
Jacket Colour	Black RAL9005		
Armour		Galvanised Steel Wire	
Construction	0.9±0.02×30±3		
Outer Jacket		PE	
Thickness (mm)	1.2		
Diameter (mm)	12.60±0.40		
Jacket Colour	Black RAL9005		
Electrical Characteristics			
Max Conductor DC Resistance	< 96.5 at 20°CΩ/100m		
Rated Temperature	70°C		
Rated Voltage	<100V		
Minimum Insulation Resistance	1.5 @ 20°C [MΩ/m]		
Mutual capacitance	<64 (at 800Hz) (nF/km)		
Pair to pair capacitance unbalance	275 (at 800Hz) (pF/500m)		

Securiflex Ltd

Units 6-9 Mackley Ind Est

Small Dole

Henfield

West Sussex

Our Other Products Include

Coaxial Cable

RG & URM Coaxial
CCTV Coaxial
Composite / Hybrid
Digital Coaxial

Networking Cable

Cat5E UTP/FTP (100 MHz)
Cat6 UTP/FTP (250 MHz)
Cat6A U/FTP (500 MHz)
Cat7 S/FTP (600 MHz)

Data Cabinets

Wall & Floor Standing Cabinets
Server Cabinets
Cabinet Accessories

Alarm Cable

TCCA
Premium BS4737

Belden Style Cable

Single Pair Cable
Overall Shielded Cores
Overall Shielded Pairs
Foil & Braid Shielded Pairs
Individually Shielded Pairs

Bus / Profi-Bus

Telecom Cable

Budget Telecom
CW1308

CW1128/98

Bell Wire

Speaker Cable

Budget 13/42/79 Strands

Oxygen Free

Fire Resistant Cable

Standard / Enhanced
Mineral Insulated
Accessories

Defence Standard

7/0.2

16/0.2

BN5 9XR

Every care is taken to ensure all information in this publication is correct.No Legal responsibility can be accepted for any inaccuracy. The company reserves the right to alter or modify the information without notice.

Registered in England & Wales No. 03758330

