


SFX/ISP2-20-LSZH-GRY

ISP2-20 2pr 20AWG Individual Foil Screen 600V Grey LSZH (9402)

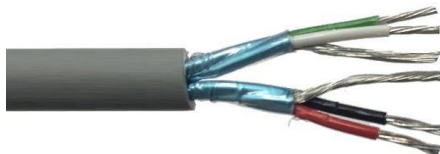

Cable Construction	2 Pairs
Conductor	Tinned Copper
Conductor Diameter (mm)	0.29 ±0.008 x 7
Stranded Diameter (mm)	0.92
Insulation	SR-PVC
Insulation Thickness (mm)	0.3
Insulation Diameter (mm)	1.45 ±0.10
Insulation Colours	Red,Black;Green,White
Drain Wire	Each pair is twisted with Individual drain wire inside it's own Al PET-Shield
Conductor	Tinned Copper
Conductor Diameter (mm)	0.15 ±0.008 x 19
Al-PET Shield	>=115% (On each pair)
Mylar Spiral	>=115% (On each pair)
Nylon Rip-Cord	White 210D
Jacket	LSZH
Jacket Thickness (mm)	1.0
Overall Diameter (mm)	7.50 ±0.20
Jacket Colour	Grey RAL 7042
Sheath Printing	ISP2-20 2x2x20AWG 600V Individually Screened LSZH RoHS2 (PO) (m)
Reaction to Fire	Eca
Electrical Characteristics	
Max Conductor DC resistance @ 20°C	<40Ω/km
Rated Temperature	70°C
Rated Voltage	600V
Insulation Resistance @20°C	>200MΩ/km