




Superior product line

Button S Jeweller

Wireless smart button.

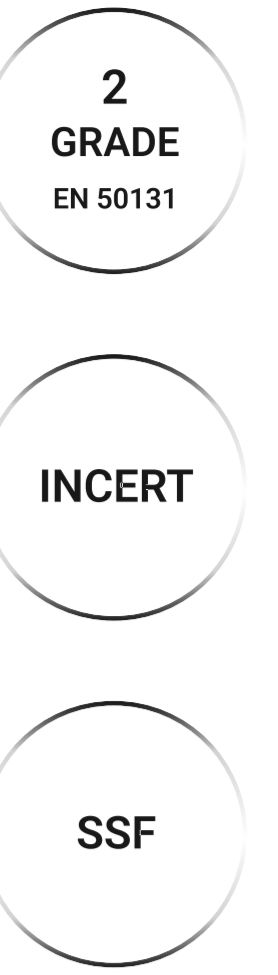

What's new

Baseline Button Jeweller	Superior Button S Jeweller
Available for all PROs	Available only for accredited partners

This is the device of the **Superior product line**. Superior products are advanced versions of the Jeweller devices. This product line is developed for projects. Only accredited Ajax Systems partners can sell, install, and administer Superior products.

Operation modes

Button supports 3 modes: **panic button**, **automation device control**, **mute interconnected fire alarm**. Operation mode is adjusted by the PRO or user with admin rights in Ajax apps.

Event types

Button supports 8 event types: **intrusion**, **fire**, **auxiliary alarm**, **panic button**, **gas alarm**, **malfunction**, **leakage**, **custom**. Event type is adjusted by the PRO or user with admin rights in Ajax apps.

Protection against accidental alarm activation: double or long press




Jeweller communication technology

- Up to 1,300 m of radio communication in an open space
- Encryption and device authentication to prevent spoofing
- Regular polling to display current device statuses



Flawless autonomy

- Up to 5 years of operation
- Pre-installed battery
- Low battery warning
- Battery status supervision



Quick installation and setup

- Pairing with a hub via QR code
- Remote control and configuration in the app
- It can be carried around on the wrist, on the neck, or on the key ring
- Fixing on a flat surface with a Holder bracket (sold separately)



Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

<p>Compliance with standards</p> <p>EN 50131-3 (Grade 2) INCERT SSF</p>	<p>Compatibility</p> <p>Hubs Hub Plus Jeweller Hub 2 (2G) Jeweller Hub 2 (4G) Jeweller Hub 2 Plus Jeweller Hub Hybrid (2G) Hub Hybrid (4G)</p> <p>Range extenders ReX Jeweller, ReX 2 Jeweller</p>	<p>Communication with control panel</p> <p>Jeweller communication technology</p> <p>Frequency bands 868.0–868.6 MHz</p> <p>Jeweller communication range up to 1,300 m In an open space.</p>	<p>Power supply</p> <p>Battery 1 × CR2032 Pre-installed.</p> <p>Battery life up to 5 years</p> <p>Manufacturer Renata</p>
<p>Installation</p> <p>Operating temperature range from –10°C to +40°C</p> <p>Operating humidity up to 75%</p> <p>Protection class IP55</p>	<p>Enclosure</p> <p>Colour white, black</p> <p>Dimensions 47 × 35 × 13 mm</p> <p>Weight 16 g</p>	<p>Complete set</p> <p>Button S Jeweller 1 × CR2032 battery (pre-installed) Double sided tape Quick start guide</p>	



For detailed information, scan the QR code or follow the link:
ajax.systems/support/devices/button-s/

- ✉ support@ajax.systems
- 📍 @AjaxSystemsSupport_Bot
- 🌐 ajax.systems