


Superior StreetSiren Plus Jeweller


Wireless siren with advanced sabotage protection and an extended list of compliance certificates. For outdoor and indoor use.

This is the device of the Superior product line. Only accredited Ajax Systems partners can sell, install, and administer Superior products.

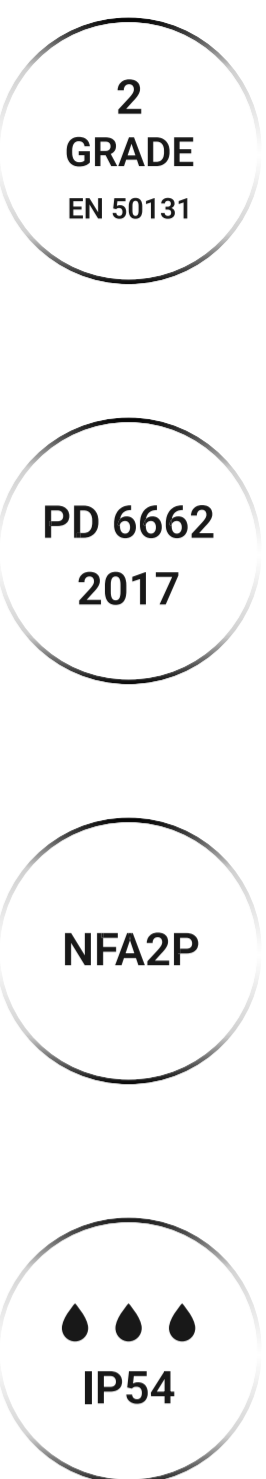

Four missions, one device

- The alarm scares off intruders and attracts attention
- Security status indication notifies users of the system being armed/disarmed and delays when entering/leaving
- The users are informed by the Chime feature if opening detectors are triggered when the system is disarmed
- After-alarm LED indication shows users and passing patrols if there were alarms in the system




Jeweller communication technology

- Up to 1,500 m (4,900 ft) of radio communication in an open space
- Data is encrypted throughout the transmission process
- Regular polling to display current device statuses




Sabotage resistance

- Tamper alarm²: a holding screw and SmartBracket
- Device authentication to prevent spoofing
- Durable enclosure
- Jamming detection




Adjustable alarm alerts

- Selectable sound patterns
- Group mode for the siren to respond to alarms and security mode changes in its assigned group only
- Adjustable volume¹ of alarm and notifications: from 85 dB to 107 dB
- Adjustable alarm duration: from 3 s to 3 min




Uninterrupted operation

- Pre-installed batteries: ready to use for immediate operation
- Up to 10 years of battery life: ensures long-term low-maintenance performance
- Low battery notifications 30 days before the full discharge to allow for timely maintenance



Easy installation

- Pairing with the system via a QR code
- The SmartBracket mounting panel for installation without disassembling the enclosure
- Bubble level to check the inclination angle of the mounting during installation
- Remote control and configuration in Ajax apps

<p>Compliance with standards</p> <p>EN 50131 (Grade 2) NFA2P PD 6662:2017 IP54</p> <p>Compatibility with hubs and range extenders</p> <p>For detailed information, scan the QR code or follow the link:</p>  <p>ajax.systems/tools/devices-compatibility/?models=SS.S.J</p>	<p>Communication with a hub</p> <p>Jeweller communication technology</p> <p>Frequency bands 868.0–868.6 MHz</p> <p>Communication range up to 1,500 m up to 4,900 ft In an open space</p>	<p>Alerts</p> <p>Alarms Acoustic, LED</p> <p>Delay when entering/leaving Acoustic, LED</p> <p>Security mode Acoustic, LED</p> <p>Security status LED</p> <p>Door opening (Chime feature) Acoustic Я</p> <p>After-alarm indication LED</p>	<p>Features</p> <p>Types of alerts Acoustic, LED</p> <p>Alarm volume from 85 dB to 107 dB at a distance of 1 m (3.3 ft) Adjusted by a PRO or a user with admin rights in Ajax apps</p> <p>Alarm duration from 3 s to 3 min</p> <p>Speaker frequency 1,400–1,600 Hz</p>
<p>Power supply</p> <p>Batteries 8 × CR123A (pre-installed)</p> <p>Battery life up to 10 years</p> <p>Backup Optional 12 V⁼⁼ remote power supply</p>	<p>Installation</p> <p>Operating temperature range from -25 °C to +60 °C from -13 °F to 140 °F</p> <p>Operating humidity up to 95%</p> <p>Protection class IP54</p> <p>Recommended installation height 2.5 m or higher 8 ft or higher</p>	<p>Enclosure</p> <p>Color white, black</p> <p>Dimensions 210.2 × 210.2 × 70.6 mm 8.3" × 8.3" × 2.8"</p> <p>Weight 1,146 g 40 oz</p>	<p>Complete set</p> <p>Superior StreetSiren Plus Jeweller 8 × CR123A battery (pre-installed) Installation kit Quick start guide</p>




¹ Measured at a distance of 1 m (3.3 ft).

² Any attempt to open the enclosure triggers a tamper alarm.



For detailed information, scan the QR code or follow the link:

ajax.systems/support/devices/superior-streetsiren-plus-jeweller/

-  support@ajax.systems
-  [@AjaxSystemsSupport_Bot](https://t.me/AjaxSystemsSupport_Bot)
-  ajax.systems