

**TITLE:**

Alarm TCCA Type 3 PVC

**CODE:**

SFX/6C-TY3-PVC-WHT-100




**DESCRIPTION:**

100m 6 Core TCCA Type 3 Alarm Cable  
White PVC

**SUPPLIED AS:**

Reel of 100m

- Generally used for connecting alarm equipment such as sensors, control panels and other low voltage circuits
- This cable is ROHS compliant
- Polyvinyl chloride plastic has excellent aging properties and will usually exceed a 25-30 year service life
- This is the most popular and cost effective cable for general intruder alarm solutions
- Improved performance and protection against fire



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23



# Product Specification



## Cable Construction

Cable Construction	6 Cores
CPR	Eca
Conductor	Tinned Copper Clad Aluminium
Conductor Diameter (mm)	0.20 ±0.008 x 7
Stranded Diameter (mm)	0.22
Overall Diameter (mm)	4.00 ±0.200
Compliance and Standards	BS4737-3.30:2015,RoHS2 2011/65/EU

## Insulation

Insulation	PVC
Insulation Colour	Red,Black,Blue, Yellow,Green,White
Insulation Resistance @20°C	>200 MO/km
Insulation Thickness (mm)	0.21

## Outer/Jacket Specification

Jacket	PVC
Overall Colour	White
Overall Diameter (mm)	4.00 ±0.200
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.5
Nylon Rip-Cord	Yellow 210D

## Electrical Characteristics

Insulation Resistance @20°C	>200 MO/km
Max Conductor DC resistance @ 20°C	155O/km
Rated Temperature (°C)	-20°C to 80°C
Rated Voltage (V)	30V



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



# ALARM CABLE




Alarm cable

## MORE INFORMATION:

EURO CLASS (ca:cable)	CLASSIFICATION CRITERIA		CPR GUIDE	
	FIRE RATING	SFX COMMENT	Securi-Flex®	
Reaction to Fire BS EN ISO 1716			SUBCLASSIFICATIONS FOR EUROCLASSES B <sub>ca</sub> to D <sub>ca</sub>	
<b>A<sub>ca</sub></b>	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet A <sub>ca</sub> , so they should only be specified with extreme caution.	<b>(S) SMOKE PRODUCTION</b>	<b>(D) FLAMING DROPLETS</b>
Reaction to Fire BS EN 50399			BS EN 50399/BS EN 61034-2	BS EN 50399
<b>B1<sub>ca</sub></b>	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1 <sub>ca</sub> .	s1a: s1 + transmittance >=80% (BS EN 61034-2)	d0: No fall of droplets or flaming particles, times for 1200 seconds
<b>B2<sub>ca</sub></b>	Combustible, low flame spread & heat release contribution to the fire	Similar to Class C <sub>ca</sub> , although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.	s1b: s1 + transmittance >=60% <80% (BS EN 61034-2)	d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds
<b>C<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class D <sub>ca</sub> , this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class C <sub>ca</sub> though availability is improving.	s1: Low production of slow propagation of smoke	a1: Very low acidity (conductivity <2.5 µS/mm & pH >4.3)
<b>D<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.	s2: Intermediate production & propagation of smoke	a2: low acidity (conductivity <10 µS/mm & pH >4.3)
Reaction to Fire BS EN 60332-1-2			s3: None of the above	d2: None of the above
<b>E<sub>ca</sub></b>	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	Visit us online: <a href="http://www.securiflex.co.uk">www.securiflex.co.uk</a> The Trusted Cable Brand	
<b>F<sub>ca</sub></b>	Combustible, fire spread of more than 425mm	Cables classified to Class F <sub>ca</sub> may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.	Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2 <sub>ca</sub> to E <sub>ca</sub> . For a cable to meet A <sub>ca</sub> , B1 <sub>ca</sub> , B2 <sub>ca</sub> or C <sub>ca</sub> , there also needs to be regular on-going factory audits.	

## OUR OPERATING TEMPERATURE RANGE GUIDE

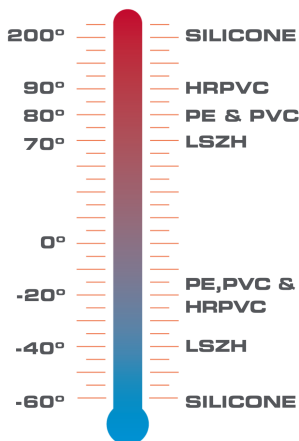

Securi-Flex®

enquiries@securiflex.co.uk | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

